



Flexi-Mat Ancillaries



get flexi in mats

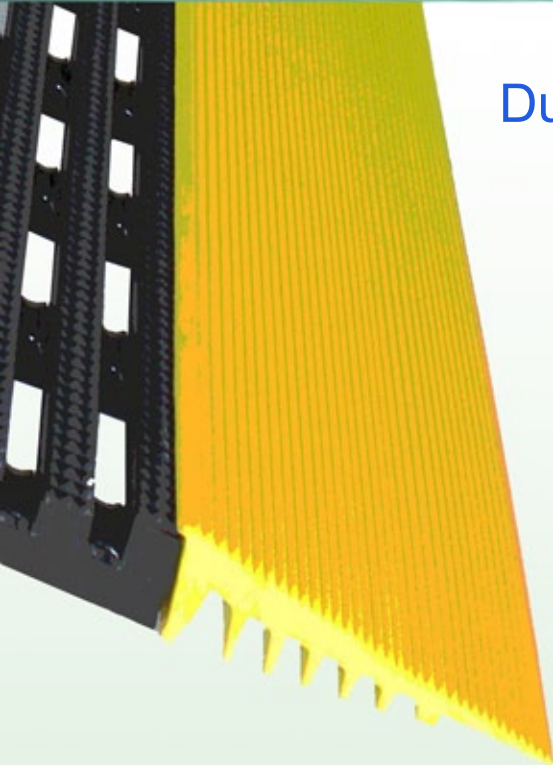

Dual Purpose Connector Clips



For use when joining multiple Flexi-Mat modules end to end or side to side.

Side To End Connector Clips

For use when joining Flexi-Mat modules side to end to make "L" or "T" shapes.



Floor Hooks


For use when fixing Flexi-Mats to the floor as required. Easily fitted with the screws and plugs provided.



Small



Large

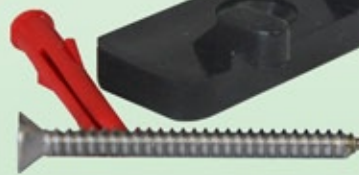


Flexi-Edge 60mm




For use when Flexi-Mats require a ramped edged to ease wheeled traffic access. Can be factory or DIY fitted.

Flexi-Edge 25mm

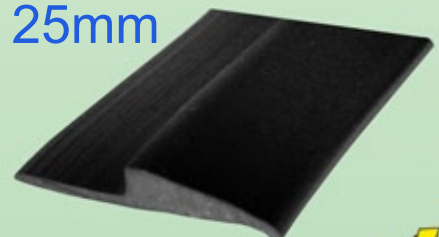

Flexi-Mat Ancillaries




get flexi in mats

Connector clips for use with Flexi-Mats

To join lengths of Flexi-Mats end to end or side to side use the dual-purpose connector clips at 5 per lineal metre as shown below.

1. To join the Flexi-Mat lengths end to end insert the dual purpose connector clip between the longitudinal bars and over the cross bar from the top as shown in fig.1
2. To join side by side insert the dual-purpose connector clip between the cross bars and the longitudinal bars from underneath as shown in fig.2

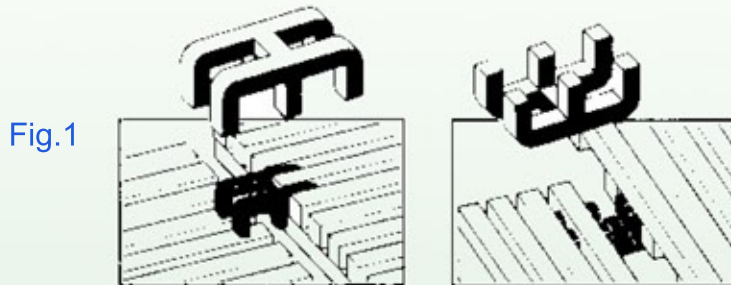

3. To join Flexi-Mat lengths side to end insert the 'S' shape connector clip between the longitudinal bars from over the cross bars from the top and between the longitudinal bars from the bottom as shown in fig.3



Floor Hooks for use with Flexi-Mats

Use floor hooks where a semi-permanent fixing is required.
Floor hooks are supplied complete with plugs and screws.

1. Lie out the Flexi-Mats and mark the position for each floor hook on the floor below.
2. Fixings points should be approximately 300mm centres across the mat and approximately 2000mm along the length.
3. Each row of floor hooks must face the opposite direction to the previous row as shown in Fig.4.
4. If the subfloor is of timber construction the floor hooks can be screwed directly to the floor. if the subfloor is of concrete a hole should be drilled to accommodate the plug provided.
5. When all floor hooks are in place gently stretch the mat over the hooks and allow the cross bars to retract under the hook.
6. When handling the mats during installation, avoid dragging or rough handling that stretch or distort them.



For Flexi-Edge instructions see separate sheet

