


# **WYNAGRIP**<sup>®</sup>



**The High Performance Industrial Matting**


*get flexi in mats*

**WYNA  
GRIP**

## **When Safety Matters**



**WYNA  
GRIP**

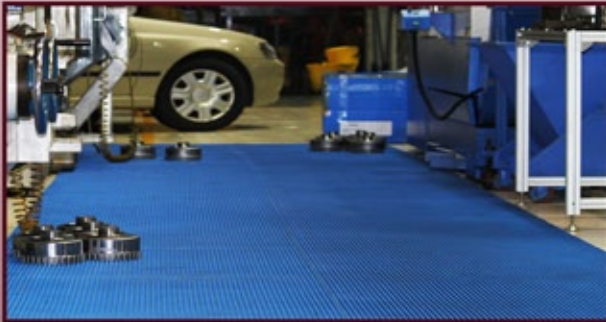

**WYNA  
GRIP**



### **Vynagrip.....**

- \* Increases productivity by reducing fatigue
- \* Extremely hard wearing and maintenance free
- \* Chemical, oil and acid resistant, also easy to clean
- \* Protects dropped tools and components from damage
- \* Excellent slip resistance and open grid design
- \* Vynagrip 'Plus' has bright yellow edges for added safety, demarcation or route marking
- \* Made from 100% recyclable food grade materials



# VYNAGRIP®


THE HEAVY DUTY INDUSTRIAL MATTING



*get flexi in mats*

Vynagrip is specially designed to provide a comfortable and slip resistant surface which will reduce leg strain and tiredness whilst helping to boost productivity. The open grid design means spillage and dirt fall through so that a safe work area can be maintained.

Used in all types of manufacturing environments where the comfort and safety of personnel is a priority. Vynagrip's deeply cut tread surface reduces the risk of accidents, it is extremely hard wearing and is resistant to most acids, alkalies and oils.

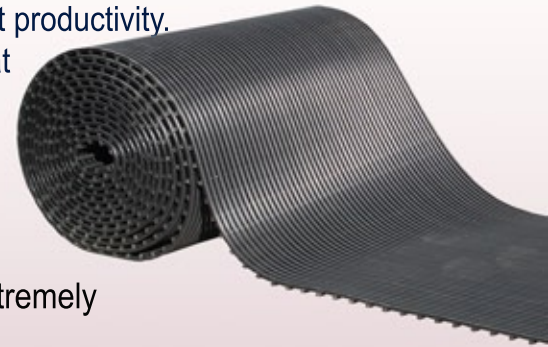

**Vynagrip Plus** has a 50mm bright yellow border along each side for added safety, route marking or demarcation. **Vynagrip 'S'** is manufactured from a specially formulated material that provides extra comfort in very cold environments.

Sizes & Weights	Length	Height	Width	Weight
Tolerance	+/- 0.015	+/- 0.5	+/- 0.1	
All dimensions nominal	Metres	mm	cm	kg/m <sup>2</sup>
Rolls	10 - 30	14.5	60,75,91,122	7.4
<b>Standard Colours</b>	Grey,Blue,Black,Red,Black with yellow sides. Others on request			
<b>Composition</b>	100%Flexible low toxicity PVC Phenol free and classified according to AS2070-1999 and CFR21 as suitable for food contact.			
<b>Construction</b>	Open grid. 28mm x 5mm grid size.			
<b>Flammability</b>	Classified as resistant to flame DIN 4102 part 1 Classification B2 Limiting Oxygen index 20. Self extinguishing			
<b>Chemical</b>	Resistant to alcohols,aliphatic hydrocarbons, most oils and acids			
<b>Electrical</b>	Dielectric Strength Kv/15 Volume resistivity Ω-cm 1.2x10 <sup>13</sup>			
<b>Thermal</b>	Functional -12° to +60°C Vynagrip 'S' from -40			
<b>Ultra Violet Light</b>	Resistant to PVC degradation			
<b>Slip Resistance</b>	Coefficient of friction (μ) Dry Tan φ = μ 0.710 Coefficient of friction (μ) Wet Tan φ = μ 0.682			
<b>Additional Benefits</b>	Excellent Drainage Good Sound insulating properties			
<b>Impact Resistance</b>	At 10 degrees 1.0kg at 200mm			
<b>Ancillaries</b>	60 mm wide Flexi-Edge factory or DIY fitted. Black or Yellow Connector Clips, Floor Hooks			

Slip resistance can vary with different shoe and sole types and in different conditions

Available from:

